



The LS471 is the up / down column lighting version of the Centria series. It also performs well for illuminating large wall expanses. Reflectors with different beam angles can be fitted to each side. Integral electronic control gear is a standard feature of LS471. Choices of lamps, beam angles, light and glare control accessories are available.


SPECIFICATIONS

Lamp Source	MH / HIT T4.5 (G8.5)	2 x 20 W
IP Rating	IP66 / IP67	
Construction	Powder coated aluminium ■ Black ■ Silver Custom powder coat colours available.	
Installation Type	Wall mount	
Standard Inclusion	Electronic control gear	
Ambient Operating Temperature	-20 °C to +50 °C	
Warranty	2 year structural, 1 year electrical	
Accessories <i>Order separately</i>	LS6065 Linear spreader lens LS6066 Prismatic lens LS6067 Concentric louvre LS6064-R/G/B/Y Dichroic filters	
Photometrics	Go to www.lumascope.com.au ▶ Technical Data ▶ Photometric Files	


NOTE: Product specifications are subject to change without notice. Any luminaire can become hot - take care with appropriate use and placement.



LS471 Centria
Wall Mount Up / Down



CONFIGURE THIS PRODUCT >

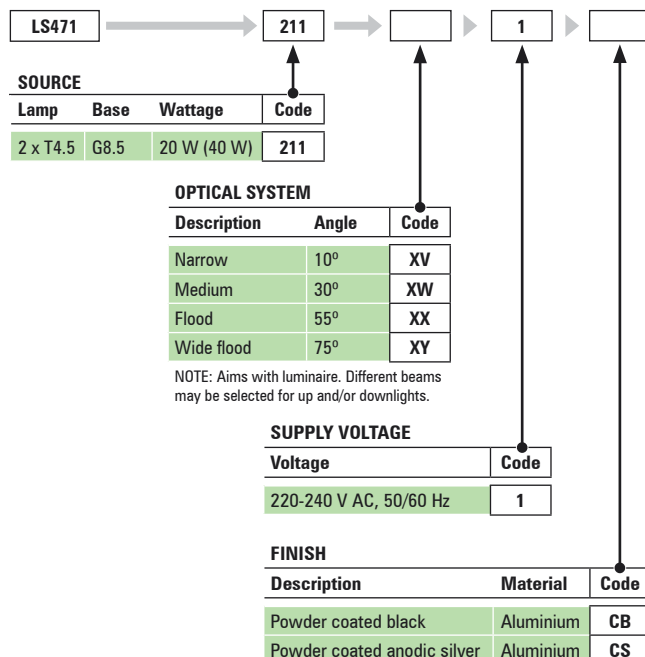

ACCESSORIES

NOTE: Different options may be selected for up and/or down lights.

Other accessory stacking options may be available - consult factory