


The LS471LED is the up/down column lighting version of the Centria series. It also performs well for illuminating large wall expanses. Reflectors with different beam angles can be fitted to each side. The integral driver is a standard feature of LS471LED. Choices of lamps, beam angles, light and glare control accessories are available.

**SPECIFICATIONS**

<b>LED Source</b>	LED 2 x 14 W <sup>(1)</sup> <input type="checkbox"/> White (4300 K typical) <input type="checkbox"/> Warm white (3000 K typical) <input type="checkbox"/> Blue (470 nm)
<b>IP Rating</b>	IP66 / IP67
<b>Construction</b>	Powder coated aluminium <input type="checkbox"/> Black <input type="checkbox"/> Silver
<b>Installation Type</b>	Wall mount
<b>Standard Inclusion</b>	Integral driver <b>OptiClear™</b> glass
<b>Ambient Operating Temperature</b>	-20 °C to +50 °C
<b>Warranty</b>	2 year structural, 1 year electrical
<b>Accessories</b> <i>Order separately</i>	<b>LS6104</b> External glare shield
<b>Photometrics</b>	Go to <a href="http://www.lumascope.com.au">www.lumascope.com.au</a> ▶ Technical Data ▶ Photometric Files
<b>Surface Temperature</b>	<b>HumanTouch™</b> compliant ≤65 °C



**LS471LED Centria**  
Wall Mount Up / Down

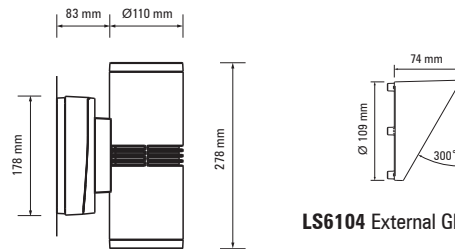


**LS6104** External Glare Shield

NOTE: Product specifications are subject to change without notice. Any luminaire can become hot - take care with appropriate use and placement.

<sup>(1)</sup> Nominal power consumption only, actual power consumed may vary.

**CONFIGURE THIS PRODUCT >**

Same Options for Up and Down

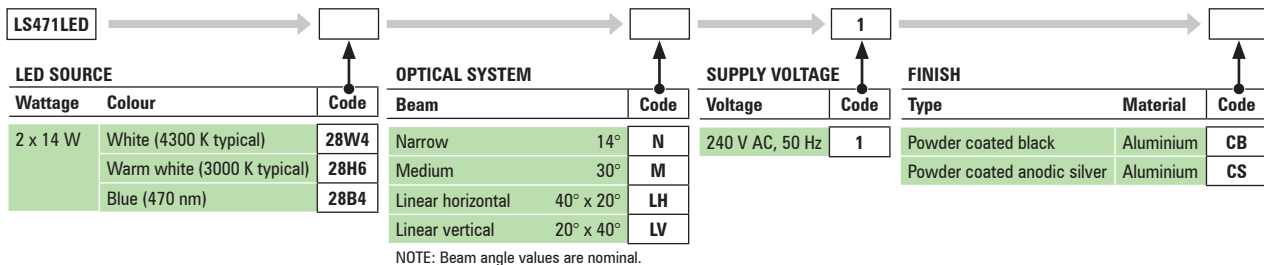

Different Options for Up and Down

