




The LS793 is a compact inground luminaire featuring a small aperture. The compact size allows the luminaire to be integrated into more places without appearing to dominate the architecture or landscape. For a superior wall wash effect, a factory set lamp tilt option is available delivering more light onto the desired surface.

SPECIFICATIONS

Lamp Source	Halogen MR11 / MR16 (GU5.3)	20 W max ⁽¹⁾
	MH MR16 (GX10) <i>Remote control gear only - see diagram</i>	20 W max ⁽¹⁾
	Halogen MR16 (GU10)	50 W max ⁽¹⁾
IP Rating	IP68	
Construction	316 marine grade stainless steel and die-cast brass	
Installation Type	Direct burial <i>Landscapes, etc.</i>	
Static Load Rating	750 kg	
Impact Rating	IK7	
Standard Inclusions	MicroAntiLeach™ cable entry Internal glare control louvre	
Ambient Operating Temperature	-20 °C to +50 °C	
Warranty	5 year structural, 1 year electrical	
Photometrics	Go to www.lumascope.com.au ▶ Technical Data ▶ Photometric Files	
Glass Temperature	HumanTouch™ compliant ≤65 °C MR11 / MR16 (GU5.3) 20 W	




LS793

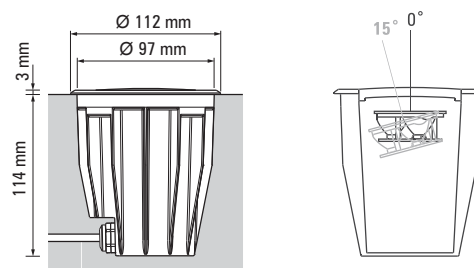

Tilt Angles
Factory set at 0° or 15°

NOTE: Product specifications are subject to change without notice. Any luminaire can become hot - take care with appropriate use and placement.

⁽¹⁾ Nominal power consumption only, actual power consumed may vary.

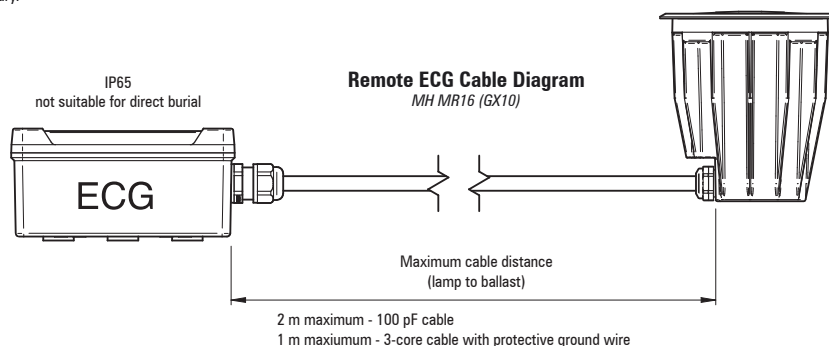

CONFIGURE THIS PRODUCT >

LS793	→	[]	→	[]		
SOURCE						
Lamp	Wattage	Base	Voltage	Code	TILT Angle	TILT Code
Halogen MR11 / MR16	20 W max	GU5.3	12 V AC 50 Hz ⁽¹⁾	293	0°	U
MH MR16	20 W max	GX10	Remote ECG ⁽²⁾	296	15°	W
Halogen MR16	50 W max	GU10	240 V AC 50 Hz	253		

⁽¹⁾ Requires remote transformer.

⁽²⁾ Distance from lamp 1 m maximum. See diagram above.